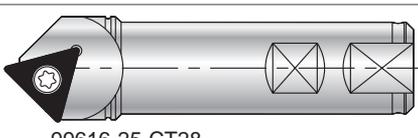




角度	ホルダー	インサート	D min.	D max.	モミツケ加工	面取り加工	溝入れ加工	刻印加工	穴あけ加工	ページ
NCスポットドリル										
60°	 99616-09V	 V9MT0802	1	9	●	●	●	● Tmin=0.1		15
	 99616-13V	 V9MT12T3	2	13	●	●	●	● Tmin=0.1		15
82°	 99619-V082-3/8	 V0820802	2	9	●	●	●	● Tmin=0.1		16
	 99619-V082-5/8	 V08212T3	2	14	●	●	●	● Tmin=0.1		16
90°	 99616-06-6...	 N9MT05T1	1	6	●	●		● Tmin=0.1		17
	 99616-10...	 N9MT0802	2	10	●	●	●	● Tmin=0.1		18
	 99616-10-M5	 N9MT0802			●	●	●	● Tmin=0.1		18
	 99616-14...	 N9MT11T3	3	14	●	●	●	● Tmin=0.1 (2コーナータイプインサート)		19
	 99616-14-M8	 N9MT11T3			●	●	●	● Tmin=1.0 (4コーナータイプインサート)		19
	 99616-22	 N9MT1704	3	22	●	●	●			20
	 99616-25-CT28	 N9MT2204	4	25	●	●				21
	 99616-20-100	 N9MT11T3	3	16	●	●				22
120°	 99616-20-120	 N9MT11T3	3	17	●	●			22	
142°	 99616-20-142...	 N9MT11T3	3	18	●	●				22
	 99619-V142...	 V1421604	2	32	●					23
145° + 90°	 99616-10 / 14 / 22 ...	 WSP / M4~M16	3.3	20	●	●	●			13